

X – 15” INDUSTRIAL PC

Product Overview

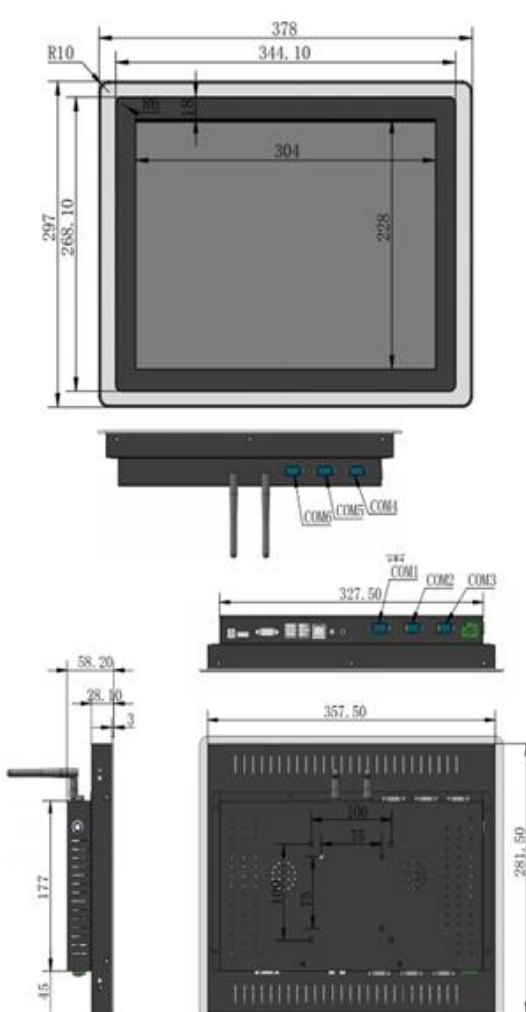


Function

Features	
Super compatibility	In machinery, automobile, petroleum, chemical, paper, water treatment and many other fields, are Perfectly compatible with all kinds of configuration software, data acquisition, pro
Industrial precision touch	Can sense the size of 1mm accuracy, less than 5ms response speed, surface With smooth surface and fog surface processing stability, touch times can be up to 55 million times.
Multi-task stable operation	Built-in powerful military motherboard, equipped with Inter super CPU, multiple tasks with .There is no pressure to run in time, making industrial production more efficient.
Multi-screen display without delay	Support external expansion HDMI/VGA display, synchronous screen without delay, available .Synchronizing production information in each link of the production line, or for industrial monitoring room to control the production schedule.

24 hours non-stop operation	Fully enclosed fan-free dustproof design, heat dissipation through aluminum plate and metal back shell, low noise Sound cooling effect, 24 hours of continuous operation without pressure.
Support power-on autostart	Through the BIOS, you can set the automatic power-on function, which is suitable for intermittent power supply It is necessary to maintain the use environment of power on and boot.
High temperature resistance, more low temperature resistance	After strict temperature control box test, it can run stably in -10° to 60° environment, namely Make in the complex harsh industrial environment also fearless.
Waterproof and dustproof, scratch-proof and durable	Flat panel IP65 dustproof and waterproof grade, effectively prevent dust and water droplets into the machine Inside, mohs level 7 hardness touch screen, longer screen life is not easy to scratch.
Pressure resistance, corrosion resistance, electromagnetic resistance	The whole machine adopts aluminum alloy flat surface seamless design, anti-fouling, anti-corrosion, not easy to deformation, anti-collision Strong and durable, in line with MC anti-electromagnetic interference standards, more stable operation in industrial field. .

≡,Parameter configuration

Parameter		
	Product size	378×297mm
	Display area	304×228mm
	Resolution	1024×768 (16: 9)
	Contrast Ratio	700: 1
	LCD color	16.7M
	Panel thickness	18mm (aluminium panel)
	Physical hardness	Morse level 7
	Waterproof & dustproof	IP65
	Touch parameter	
	Touch type	Capacitive
	Touch point	10 touch points
	Response speed	< 5ms
	Size of induction	≥1mm

		Touch screen resolution	32767×32767
Host parameter			
Surface material	Almuninum panel with tempered glass	The body process	Almuninum body
Internal speaker	2×10W	Environment humidity	< 80%
Working power	AC100V-240V, 50/60Hz	Mounting	Desktop stand/Wall mounting/ Embedded etc
I/O ports& Switches	Support VGA / HDMI / USB / 2 LANS / COM/ RS-232/422/485		

Configuration			
mainboard	High-end solid lightning protection military level motherboard		
CPU	I5 4 th Generation		
Ram	8 GB		
Storage	256 GB SSD		
OS	Windows7/10 (can be upgraded)		
Screen size	15 "		
Touch Type	Ultra-long life classic capacitor touch		
Installation	Embedd/ wall	Resolution	1024*768
EXW price		Quantity	1set

